


Spark Module (6+0) 120 Volts, Manual Module

90600-1201-60E-03


TYPICAL WIRING DIAGRAM

SPECIFICATIONS

1. Input Power: 120 VAC, +10%. -15%, 60hz, .5VA
2. Spark Energy: Approx 6 millijoules, 14KV
3. Operating Temperature: 32°F to 221°F, 95%
Relative Humidity @ 100°F
4. Spark Frequency: 3.8hz typical
≥ 1.3hz @ 102 vac
≤ 8 hz @ 132 vac
5. Maximum Ignitor Wire Length: 48" per output or
combined length of 96".
6. Terminals:
Input: .250" x .032"
Output: .110" x .032"
7. CSA Certified

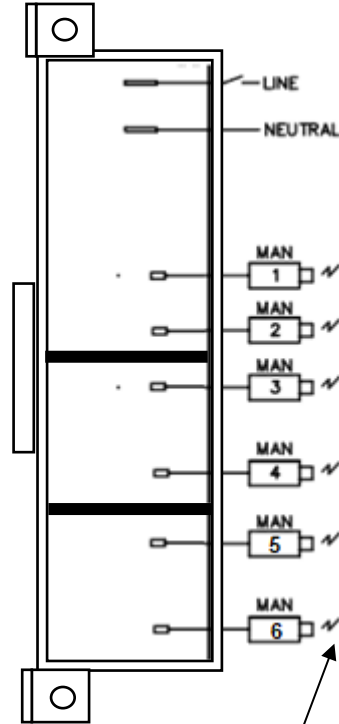

Spark Gap Min. .090", Max .150"

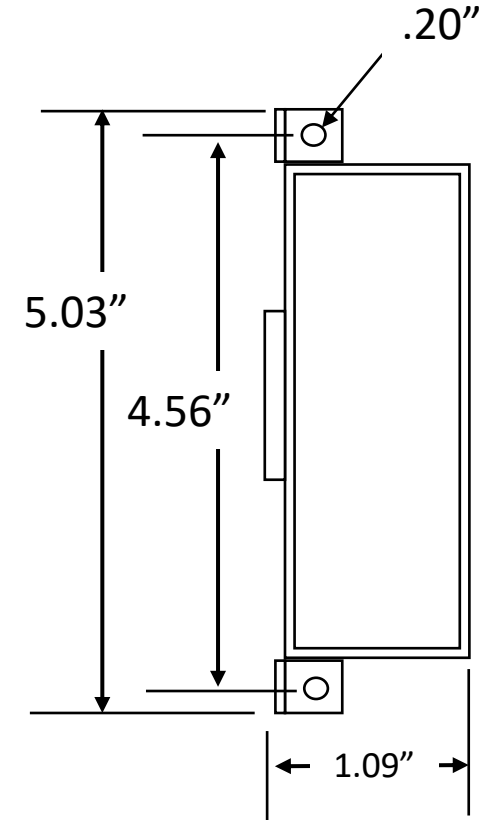

Any unused output
must be grounded to
Chassis.



1731 Myrtle Ave. El Paso, TX. 79901

1-800-880-3212

Ph.: 915-543-3212 Fax. 915-543-3213

csmail@cesar-scott.com

www.cesar-scott.com